

UFLWT800

API 682 4th Edition Category 2 & 3 Seal type C (Rotating) Configuration 1CW-FL (Contacting Wet- FLoating throttle bushing)

Product Description

- API 682 Category 2 and 3, Type C, Arrangement 1 seal
- 2. Single seal configuration
- 3. Balanced design
- 4. Independent of direction of rotation
- 5. Cartridge Construction
- 6. For plain shafts
- 7. Rotary metal bellows design
- 8. Shrink fitted seal ring and solid stationary ring

Technical Features

- 1. Compact construction
- 2. Balanced bellows design allows installation on plain sleeve
- Elimination of seal face hang up due to absence of dynamic O-Ring
- Face load variation is minimised due to bellows design on account of shaft expansion or face wear
- Resistance to abrasive particles in the medium, no shaft or sleeve fretting
- 6. Narrow seal face width leads to low heat generation and power consumption
- 7. Extended seal life

Typical Industrial Applications

- API 610/ISO 13709 pumps
- Refining technology
- Oil and gas industry
- Petrochemical industry
- Chemical industry
- Power plant technology
- LPG plants
- Process pumps

Performance Capabilities

Shaft diameter: d1 = 20 ... 110 mm (0.79" ... 4.33") Pressure: p = vacuum ... 25 bar (... 363 PSI)

Temperature: $t = -75 \, ^{\circ}\text{C} \dots +400 \, ^{\circ}\text{C} (-103 \, ^{\circ}\text{F} \dots +752 \, ^{\circ}\text{F})$

Sliding velocity: vg ... 23 m/s (... 75 ft/s)

Materials


Seal ring: Blister resistant carbon,
Silicon carbide SSiC (Q1), RBSiC (Q2)
Mating ring: Silicon carbide SSiC (Q1), RBSiC (Q2)
Bellows: Inconel® 718 (M6)
Secondary seals: Graphite (G)
Metal parts: CrNiMo steel 316 (G),

Carpenter® 42 (T4)

Recommended piping plans

Process side:

01, 02, 03, 11, 12, 13, 14, 21, 22, 23, 31, 32, 41 Atmospheric side: 51, 61, 62, 65A, 65B, 66A, 66B

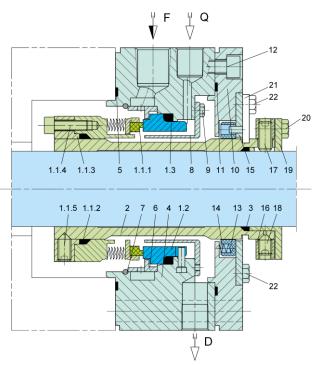

| n | B |
|---------------|-----------------------------|
| Item | Description |
| 1.1.1 | Seal ring with Bellows Unit |
| 1.1.2, 1.3, 3 | Sealing ring |
| 1.1.3 | Thrust ring |
| 1.1.4, 12 | HSH cap screw |
| 1.1.5, 17, 18 | Set screw |
| 1.2 | Mating ring |
| 2 | Shaft sleeve |
| 4 | Gland |
| 5, 11 | Gasket |
| 6 | Multi-flow distributor |
| 7 | Retaining ring |
| 8 | Quench baffle |
| 9, 20, 22 | Hexagon bolt |
| 10 | Cover |
| 13 | Throttle bushing |
| 14 | Spring |
| 15 | Washer |
| 16 | Set ring |
| 19 | Pusher ring |
| 21 | Setting plate |
| F | Flush |
| Q | Quench |
| D | Drain |